

SANITARY BUTTERFLY VALVE



Product Description


- Sanitary Butterfly Valve is widely used in beer, beverage, dairy, juice, pharmacy and bioengineering.
- High performance for Sealed, long service life and Internal and external high-grade polishing equipment to achieve surface precision
- Working pressure: 0.6Mpa, 1.0Mpa, 1.6Mpa
- Working temperature: -10°C+100°C
- Applicable medium: liquid, gas, oil, all kinds of highly corrosive chemical media
- Applications: Food, Beverage, Pharmaceutical, Dairy, Beer and Fine Chemicals

Main Specification

Nominal Size	Operated Type	Connection Mode	Work Pressure	Work Temperature	Seal Material	Disc/Body Material	Medium	Application	Connection Standard
DN15	Pneumatic Actuator	Weld	0.6Mpa	10°C+100°C	EPDM	SUS304	Water	Food	ISO
	Electric Actuator	Socket	1.0Mpa		NBR	SUS316L	Gas	Beverages	DIN
	Manual Hand Lever	Threaded	1.6Mpa		PTFE		Oil	Pharmacy	IDF
150	Worm Gear	Clamped Wafer						Milk	SMS
								Beer	3A
								Fine Chemicals	

Medium Various Highly Corrosive Chemical Media

Manual Handle Lever Operated

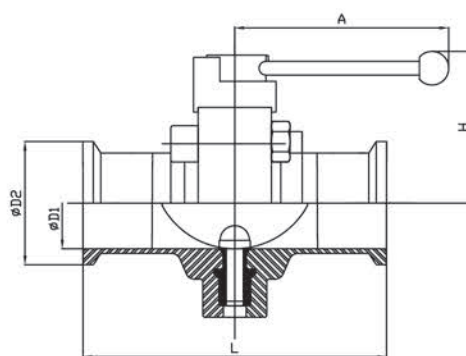

Dimensions


unit: mm

Size		D1	D2	A	L	H
DN	NPS					
50	3/4"	16.1	50.5	125	66	68
65	1"	22.4	50.5	125	66	68
80	1 1/4"	28.8	50.5	125	66	68
100	1 1/2"	35.1	50.5	125	66	72
125	2"	47.8	64	135	72	79
150	2 1/2"	59.5	77.5	135	76	86
100	3"	72.2	91	135	76	96
150	2 1/2"	85	106	160	84	101
200	4"	97.6	119	160	90	110
250	6"	154	183	230	132	147

Visit our website to know more details: www.flowxcontrol.com

FLOWX VALVE. WORLD CLASS SUPPLIERS. T(86)02134977873. F(86)0215415 0271. Email: SALES@FLOWXVALVE.COM

Pneumatic Actuator Operated

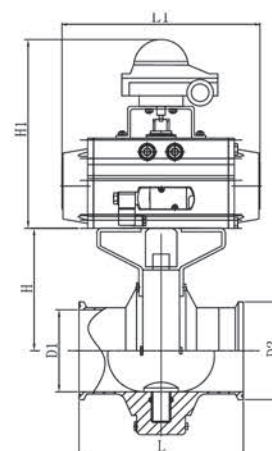


■ Dimensions

unit: mm

Size		D1	D2	L	H	SINGLE		DOUBLE	
DN	NPS					L1	H1	L1	H1
19	3/4"	16.1	50.5	66	69	162	193.5	139.5	182.5
25	1"	22.4	50.5	66	69	162	193.5	139.5	182.5
32	1 1/4"	28.8	50.5	66	69	162	193.5	139.5	182.5
38	1 1/2"	35.1	50.5	66	76	162	193.5	139.5	182.5
45	2"	42	64	70	81	162	193.5	139.5	182.5
51	2 1/2"	47.8	64	72	85	162	193.5	139.5	182.5
57	3"	53	77.5	76	88	207	210	162	193.5
63.5	2 1/2"	59.5	77.5	76	92	207	210	162	193.5
76	4"	72.5	91	76	99	207	210	162	193.5
89	6"	85	106	84	105	237.5	221.5	207	210

Electric Actuator Operated

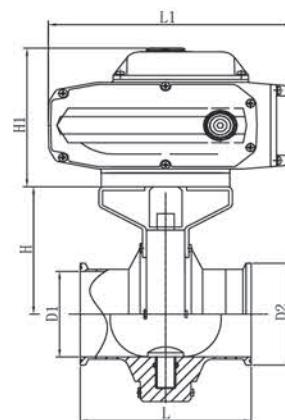

■ Dimensions

unit: mm

Size		D1	D2	L	H	L1	H1
DN	NPS						
19	3/4"	16.1	50.5	66	69	165	127.5
25	1"	22.4	50.5	66	69	165	127.5
32	1 1/4"	28.8	50.5	66	69	165	127.5
38	1 1/2"	35.1	50.5	66	76	165	127.5
45	2"	42	64	70	81	165	127.5
51	2 1/2"	47.8	64	72	85	165	127.5
57	3"	53	77.5	76	88	165	127.5
63.5	2 1/2"	59.5	77.5	76	92	165	127.5
76	4"	72.2	91	76	99	165	127.5
89	6"	85	106	84	105	211.5	145.5